









TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
3		T.S.LII	W.H.HSU	04/02/07
4		S.Y.TANG	W.H.HSU	05/29/07
5		S.Y.TANG	G.F.YANG	01/30/08

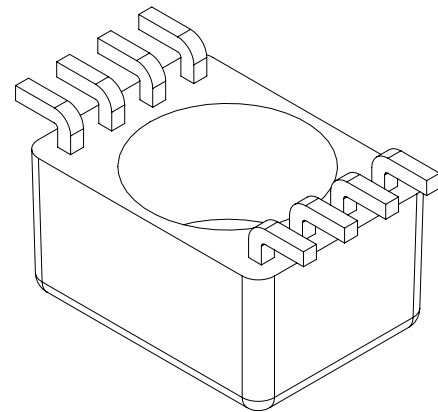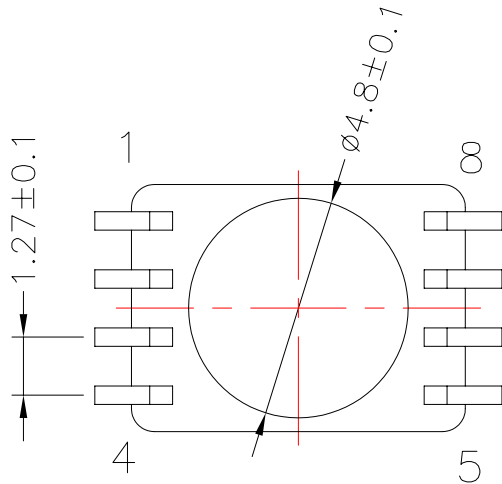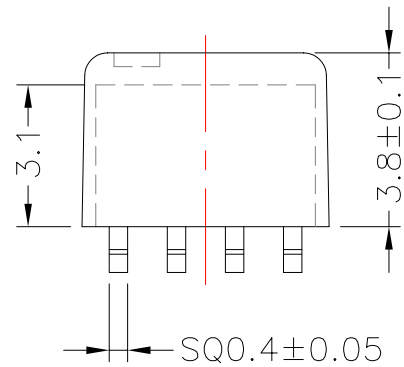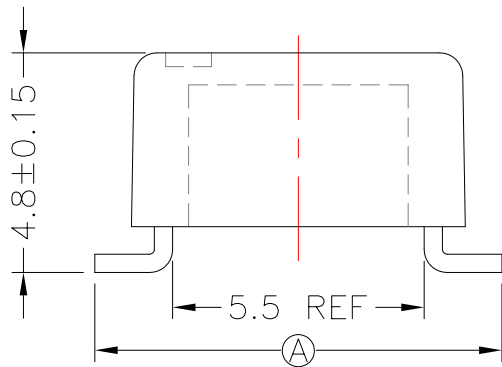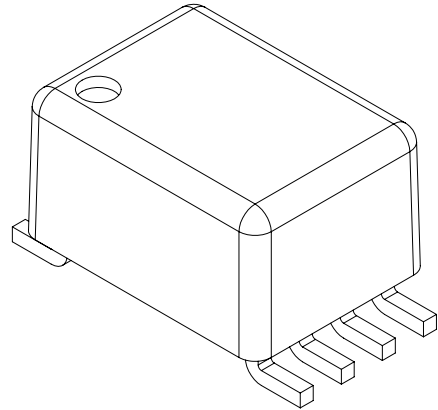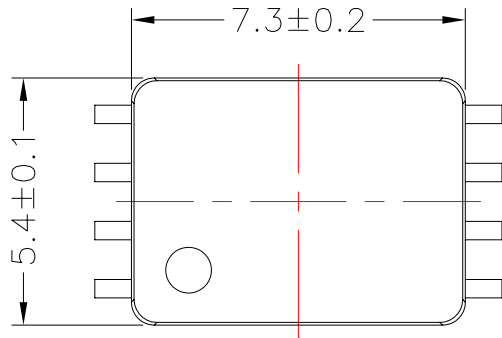

NOTE:CASE 頂部共面度為0.15 MAX.

DWG NO.	K5-8P-L-1.27-B-1				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-113-02021.103	PM-9630	P.B	Sn	ALL PIN (A)=8.9±0.2	
TBI-113-02021.113	PM-9630	P.B	Sn	ALL PIN (A)=7.3±0.2	H.
TBI-113-02021.123	PM-9630	P.B	Sn	CUT PIN#2,3,6,7 (A)=7.3±0.2	
TBI-113-02021.133	PM-9630	P.B	Sn	CUT PIN#2,3,6,7 A=8.9±0.2	
	TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05			UNIT : m / m	SCALE 6 : 1

Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.  
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.  
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 5