




TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△1		X.H.GU	G.F.YANG	05/09/20
△2				
△3				

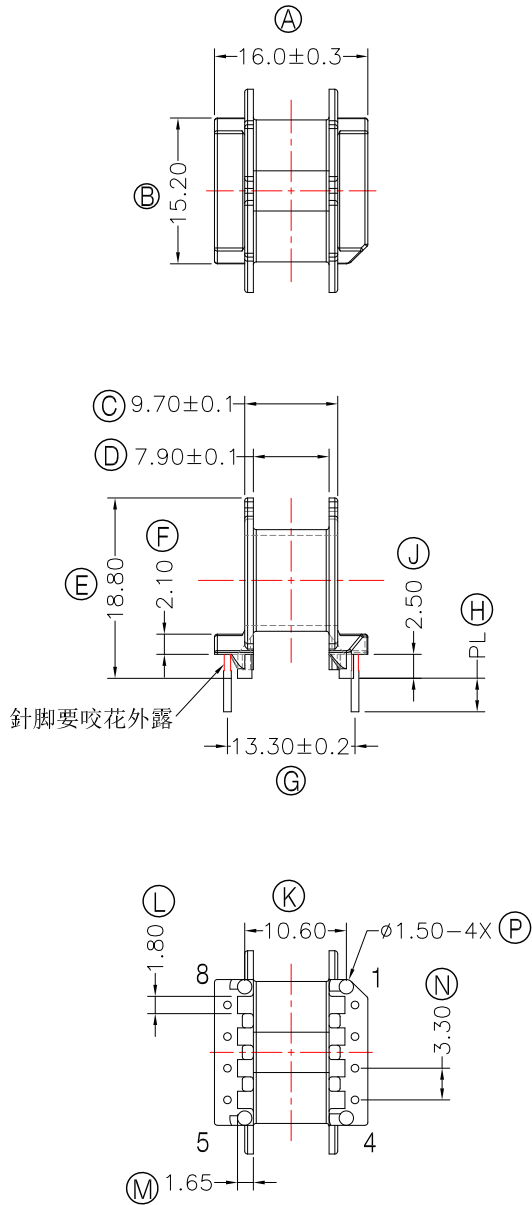

NOTE:

- 1.任一點的強度為1.5kg MIN.
- 2.耐壓4.0Kv /1.5mA 60S;
- 3.焊錫溫度:450°±10° 3SEC.
- 4.PIN拉力須焊前1.0KgMIN;焊后1.5KgMIN.
- 5.CORE TYPE :ATQ25/16N.

DWG NO.	ATQ25-16-8P-TH-3.3-C4-17						
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE		
TBI-238-09341.1706	PM-9823	CP WIRE	Sn	ALL PIN PL=3.7±0.2		H	
TBI-238-09341.1716	PM-9823	CP WIRE	Sn	CUT PIN#5,6,7,8 PL=3.7±0.2			
TBI-238-09341.1726	PM-9823	CP WIRE	Sn	CUT PIN#5,6,8 PL=3.7±0.2			
TBI-238-09341.1736	PM-9823	CP WIRE	Sn	CUT PIN#1,6 PL=3.0±0.3			
TBI-238-09341.1746	PM-9823	CP WIRE	Sn	CUT PIN#5,6,7 PL=3.7±0.2			
TBI-238-09341.1756	PM-9823	CP WIRE	Sn	CUT PIN#3,4,6 PL=4.0±0.2			
TBI-238-09341.1766	PM-9823	CP WIRE	Sn	CUT PIN#5,7,8 PL=3.7±0.2			
TBI-238-09341.1776	PM-9823	CP WIRE	Sn	CUT PIN#1,2 PL=3.7±0.2			
TBI-238-09341.1786	PM-9823	CP WIRE	Sn	CUT PIN#6,7,8 PL=3.7±0.2			
TBI-238-09341.1796	PM-9823	CP WIRE	Sn	CUT PIN#1,7,8 PL=3.7±0.2			
TBI-238-09341.17A6	PM-9823	CP WIRE	Sn	CUT PIN#4,5 PL=3.1±0.2			
TBI-238-09341.17B6	PM-9823	CP WIRE	Sn	CUT PIN#1,2,7,8 PL=3.5±0.2			
TBI-238-09341.17C6	PM-9823	CP WIRE	Sn	CUT PIN#1,2,7,8 PL=3.7±0.2			
TBI-238-09341.17D6	PM-9823	CP WIRE	Sn	CUT PIN#1,7,8 PL=2.9±0.2			
TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3				UNIT : m / m	SCALE 1 : 1		
Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.Base nickel 0.625 μm (25 μ inches) min. 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min. 3. Coplanarity deviation: 0.10 mm (0.004 inches)max.						REV	1