









TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789999
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
①		X.H.GU	G.F.YANG	12/25/08
②		G.F.YANG	W.H.HSU	01/10/09
③		YAN.TANG	G.F.YANG	12/15/09

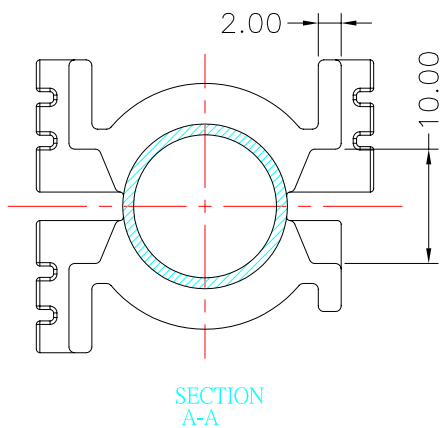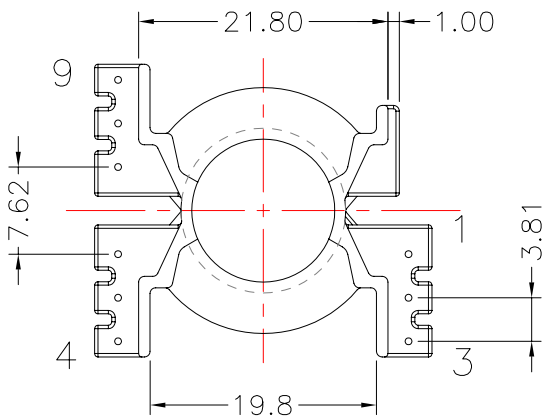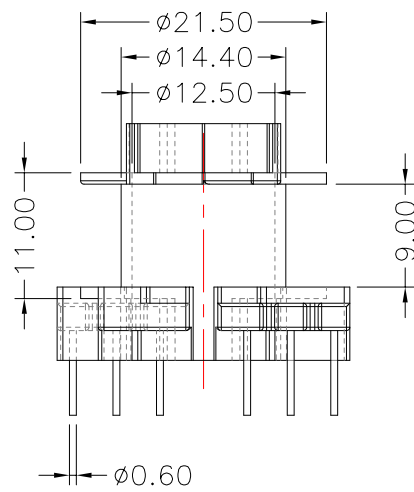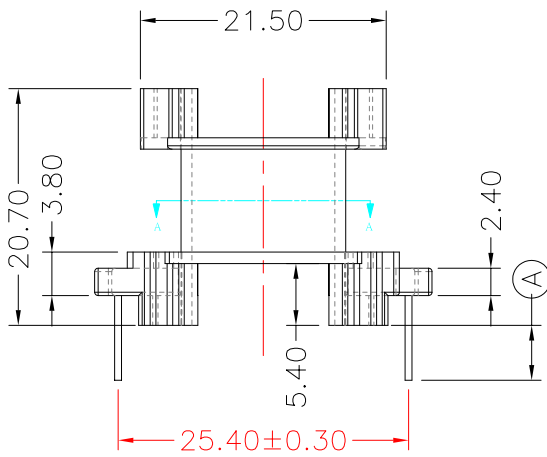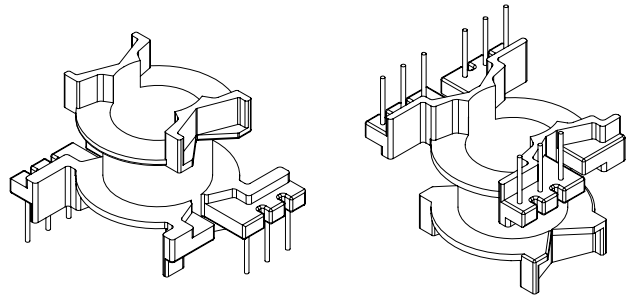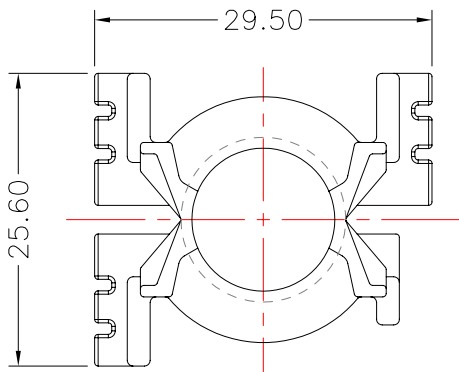

DWG NO. PQ2620-9P-TH-3.81-C-12

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-216-04031.1206	PM-9820	C.P WIRE	Sn	ALL PIN(A)=4.8±0.2 ③	
TBI-216-04031.1216	PM-9820	C.P WIRE	Sn	CUT PIN#4,6,8(A)=5.0±0.2 ③	
③ TBI-216-04031.1226	PM-9820	C.P WIRE	Sn	CUT PIN#4,6,8(A)=3.0±0.2	

TBI-216-04031.1206

PM-9820

C.P WIRE

Sn

ALL PIN(A)=4.8±0.2 ③

TBI-216-04031.1216

PM-9820

C.P WIRE

Sn

CUT PIN#4,6,8(A)=5.0±0.2 ③


③ TBI-216-04031.1226

PM-9820

C.P WIRE

Sn

CUT PIN#4,6,8(A)=3.0±0.2



TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05

UNIT : m / m

SCALE 3 : 2







Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 3


A-CORE
ELECTRICAL CO.

A-CORE JIANGMEN ELECTRONICS CO.,LTD
 江门安磁电子有限公司
 Tel : 86-750-3867791 Fax : 86-750-3867787

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△1		G.F.YANG	W.H.HSU	01/10/09
△2				
△3				

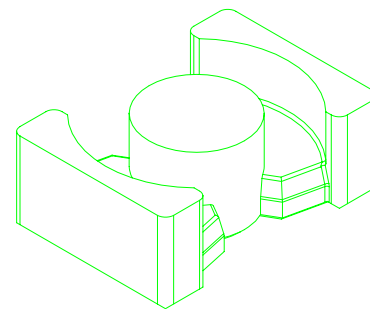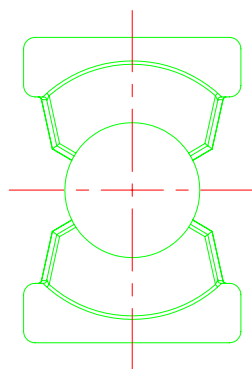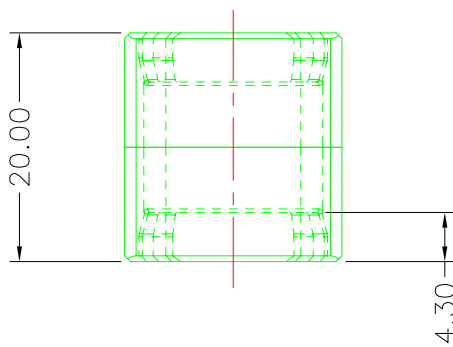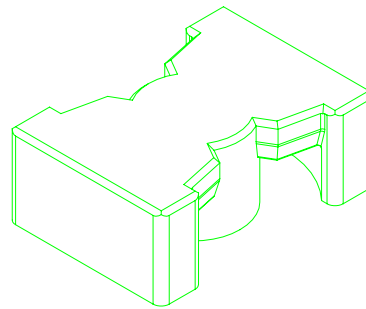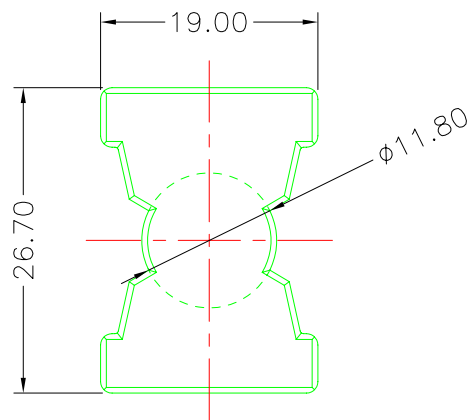

DWG NO.	PQ26/20-CORE				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
PQ26/20-CORE	JPP-44A				
PQ26/20-CORE	JPP-95				



Finish:

UNIT : m/m

SCALE 3:2







REV 1



**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
①		X.H.GU	G.F.YANG	12/25/08
②		G.F.YANG	W.H.HSU	01/10/09
③		YAN.TANG	G.F.YANG	12/15/09

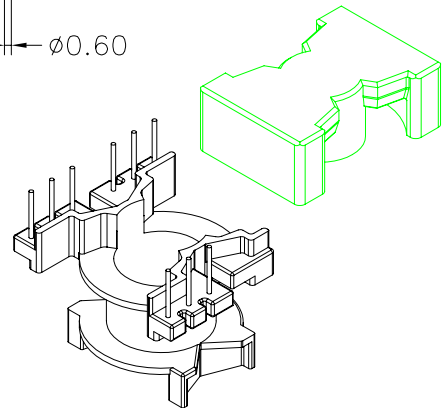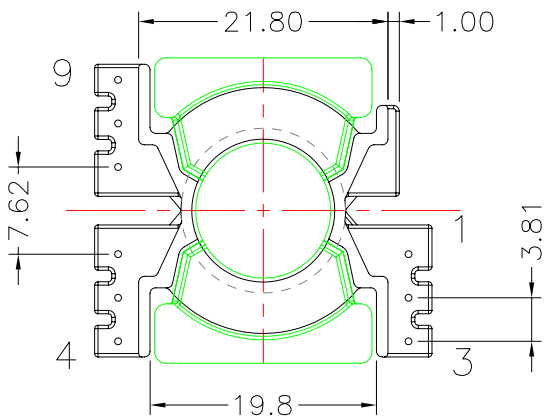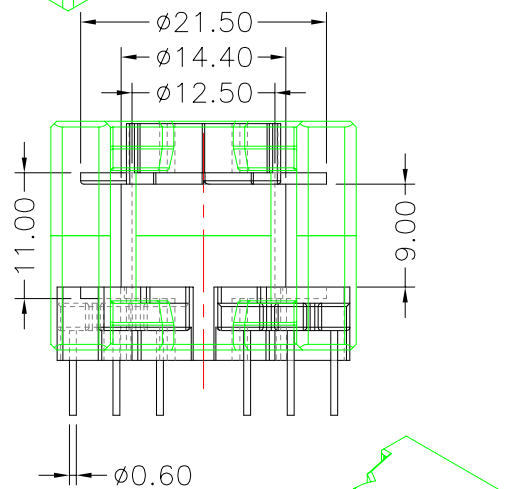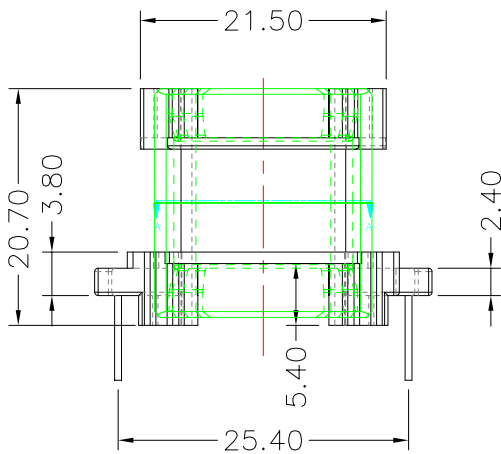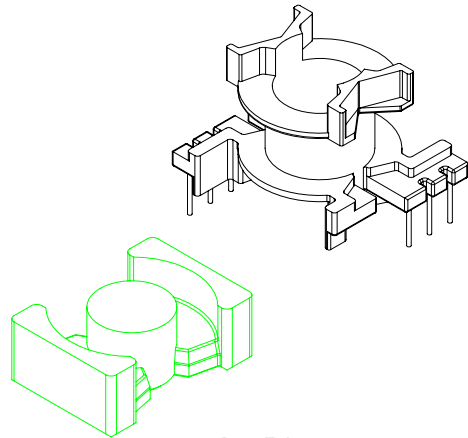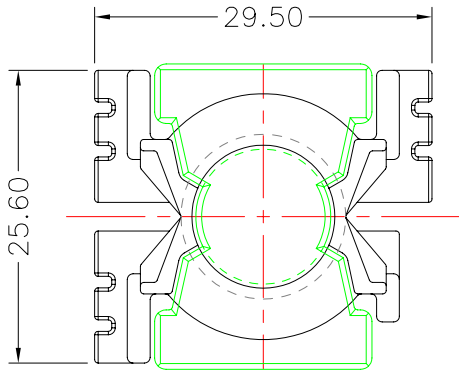

DWG NO. PQ2620-9P-TH-3.81-C-12

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE

TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05 UNIT : m / m SCALE 3 : 2

Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 3