

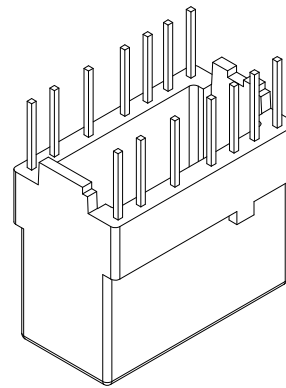
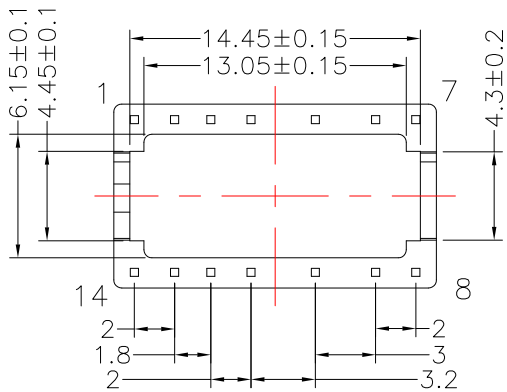
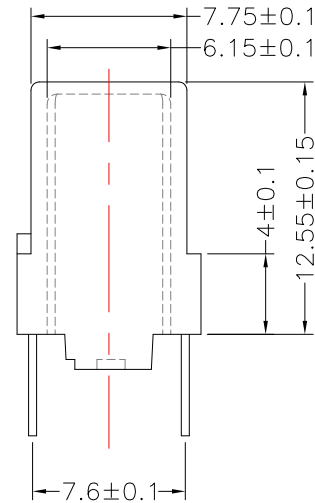
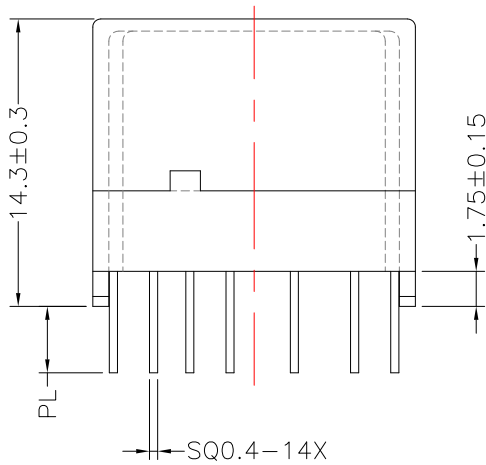


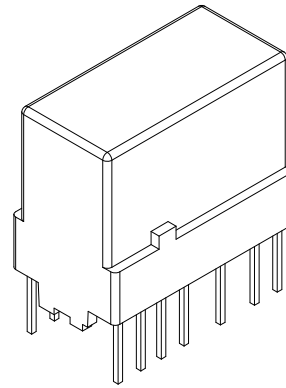

**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
①		S.Y.TANG	G.F.YANG	07/29/09
②				
③				

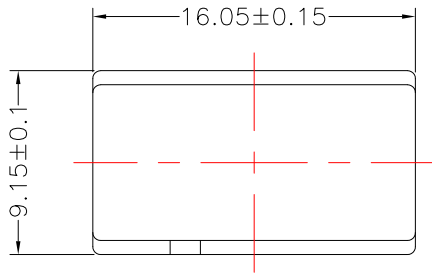

DWG NO.	H1609-14P-TH-2.0-B-11			
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION
TBI-218-08021.1103	PM-9630	PB	Sn	ALL PIN PL=3.3±0.3
TBI-218-08021.1113	PM-9630	PB	Sn	CUT PIN #3,4,11,12 PL=3.3±0.3
TBI-218-08021.1123	PM-9630	PB	Sn	CUT PIN #1,2,5,7,8,10,13,14 PL=3.3±0.3
TBI-218-08021.1133	PM-9630	PB	Sn	CUT PIN #3,4,5,10,11,12 PL=3.3±0.3
TBI-218-08021.1143	PM-9630	PB	Sn	CUT PIN #3,4,6,7,8,9,11,12 PL=3.3±0.3
TBI-218-08021.1153	PM-9630	PB	Sn	CUT PIN #3,4,6,7,8,9,11,12 PL=5.0±0.3
	TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05			UNIT : m / m
				SCALE 3 : 1
Finish:	1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min. 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min. 3. Coplanarity deviation: 0.10 mm (0.004 inches)max.			REV 1