








**TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989  
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△1		G.F.YANG	W.H.HSU	06/13/17
△2				
△3				

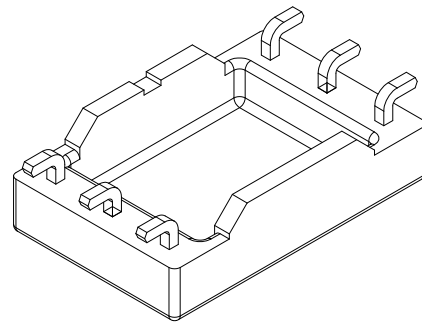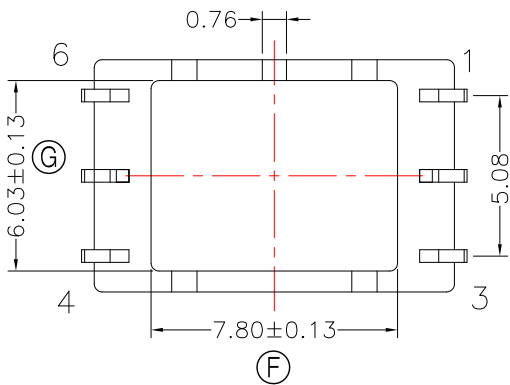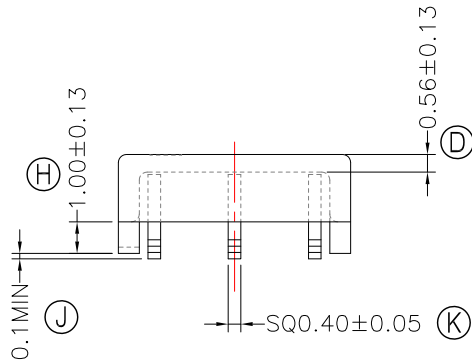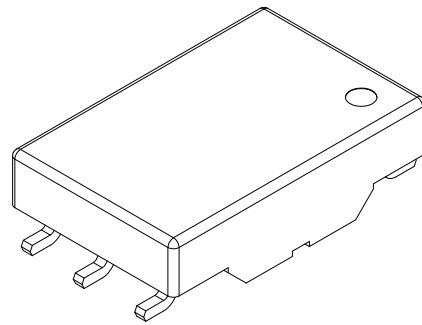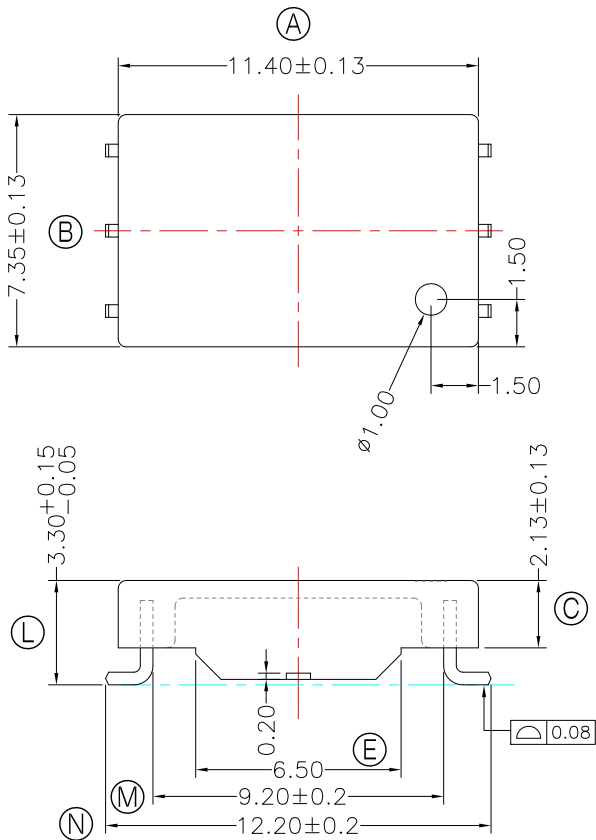


NOTE:

- \*\*\* PB wire Immersion Sn on terminal :  
 Thickness:Sn plating,100%,5.08~12.7  $\mu$ m(203.2~508  $\mu$  inches),  
 Base nickel 1.27~2.54  $\mu$ m (50.8~101.6  $\mu$  inches).
- \*\*\* Pull strength of Pin : 1.0 Kg Min.

DWG NO. 01212-6P-L-2.54-B4-11

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-113-03241.1103	PM-9630	PB	Sn	ALL PIN	H.C
TBI-113-03241.1113	PM-9630	PB	Sn	NO PIN#2,5	



TOLERANCE: ±0.13

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5  $\mu$ m (200  $\mu$  inches) min,Base nickel 0.625  $\mu$ m (25  $\mu$  inches) min.  
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,Thickness:Sn plating,100%,5~12.5  $\mu$ m(200~500  $\mu$  inches),Base nickel 1.25~2.5  $\mu$ m (50~100  $\mu$  inches),  
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1