

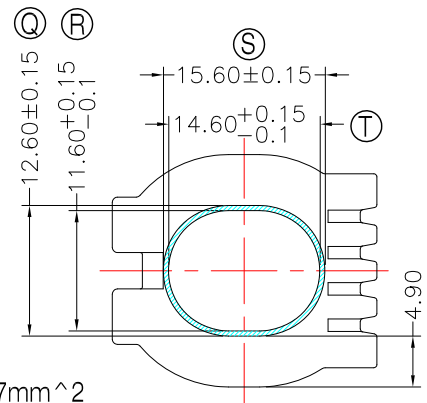
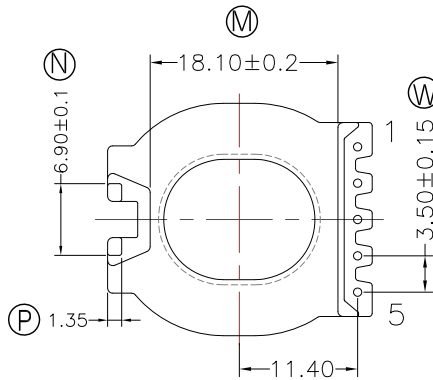
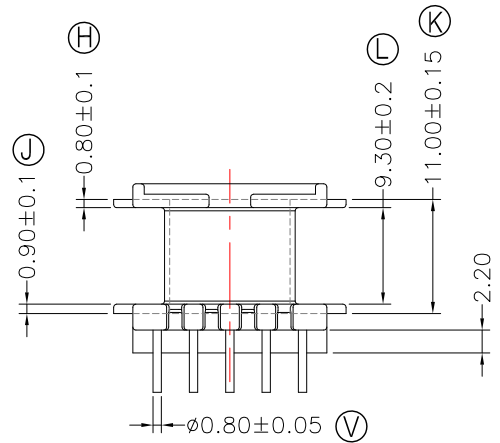
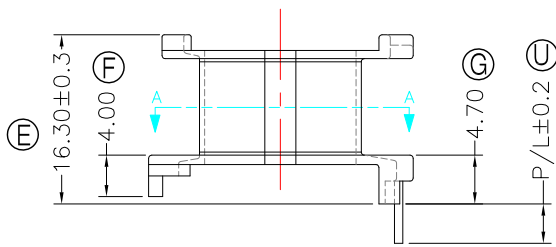


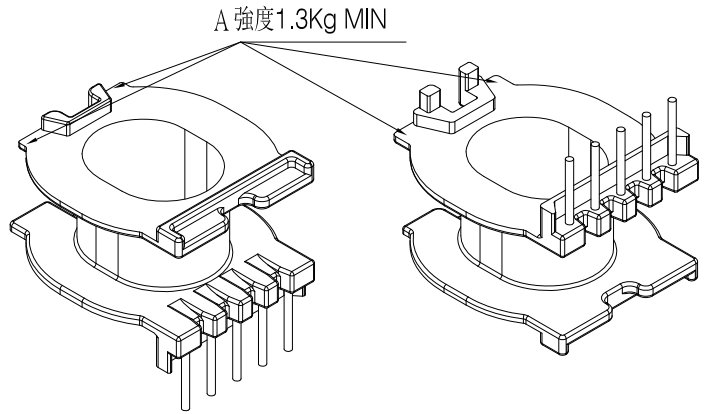

TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789998
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△1		X.H.GU	G.F.YANG	07/08/16
△2				
△3				

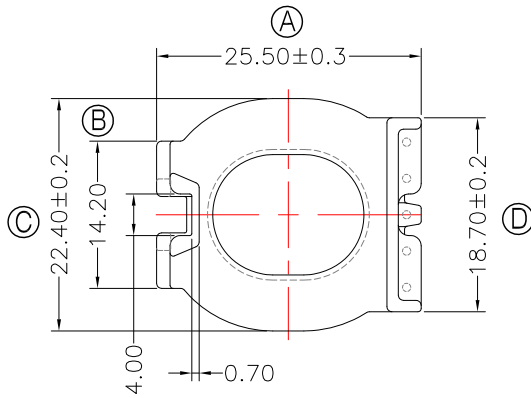


NOTE:

- 耐壓4.0Kv /1.5mA 60S;
 - 焊錫溫度:450°±10° 3SEC
 - Winding Space=9.3*4.9=45.57mm²
 - 焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
 - 任一點的強度為1.8kg MIN;其中頂部A處為1.3kg MIN;
- 與TBI-238-48061.17C(ATQ27-17J-CASE-F-17)配套使用;

DWG NO. ATQ27-17J-5P-TH-F-17

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-48061.1706	PM-9823	CP WIRE	Sn	ALL PIN P/L=3.8±0.2	S
TBI-238-48061.1716	PM-9823	CP WIRE	Sn	ALL PIN P/L=5.5±0.2	H
TBI-238-48061.1726	PM-9823	CP WIRE	Sn	ALL PIN P/L=3.2±0.2	
TBI-238-48061.1736	PM-9823	CP WIRE	Sn	CUT PIN#3 P/L=3.8±0.2	
TBI-238-48061.1746	PM-9823	CP WIRE	Sn	CUT PIN#4 P/L=3.8±0.2	
TBI-238-48061.1756	PM-9823	CP WIRE	Sn	CUT PIN#2 P/L=3.2±0.2	



TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μ m (200 μ inches) min,Base nickel 0.625 μ m (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μ m (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1