





**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**





Tel : 86-769-88789999 Fax : 86-769-88789989
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△2		Y.G.HSU	W.H.HSU	03/17/07
△3		YAN.TANG	G.F.YANG	11/29/07
△4		YAN.TANG	G.F.YANG	12/24/09

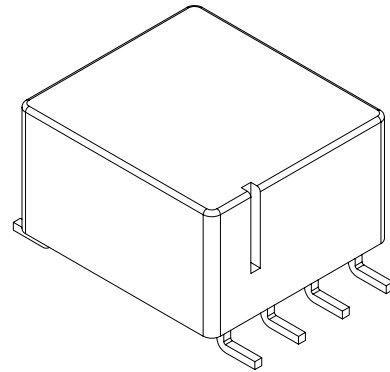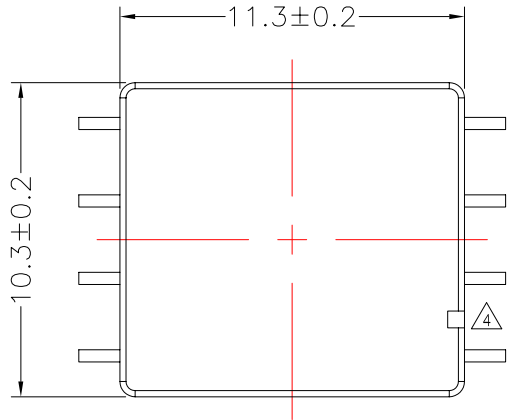

0.7±0.05

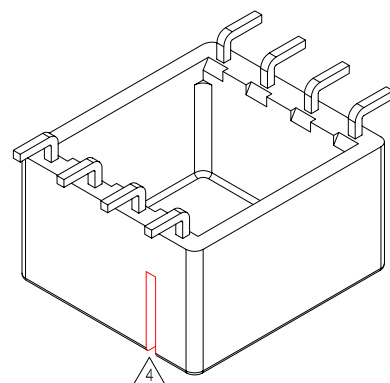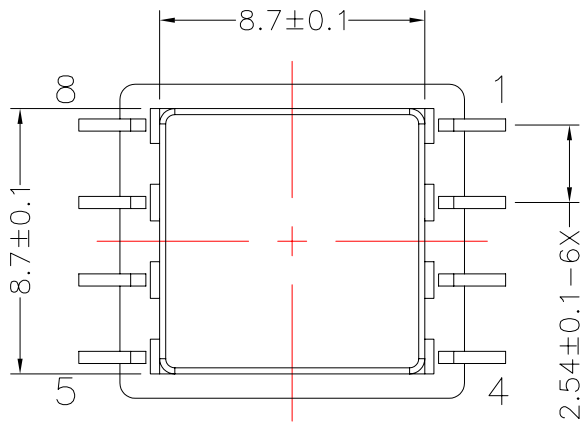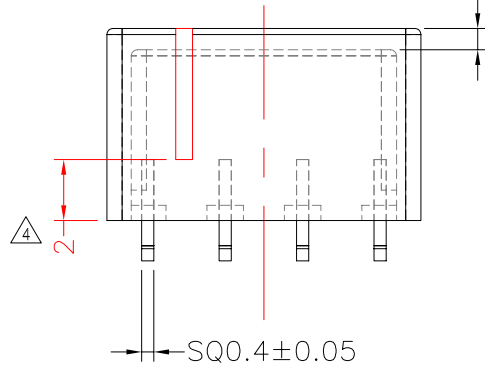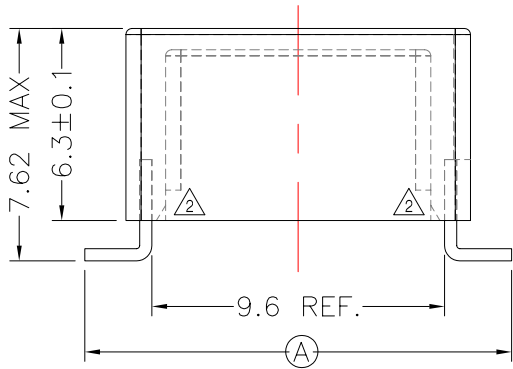

△2 NOTE: Pull Strenght 1.0kg (min)

DWG NO.	TR10-8P-L-2.54-C-1				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-113-06031.103	PM-9630	P.B	Sn	ALL PIN (A)=14±0.2	53GTR10S002A
TBI-113-06031.113	PM-9630	P.B	Sn	ALL PIN (A)=15±0.2	
TBI-113-06031.123	PM-9630	P.B	Sn	ALL PIN (A)=12.1±0.2	
TBI-113-06031.133	PM-9630	P.B	Sn	ALL PIN (A)=12.8±0.2	
	TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05			UNIT : m / m	SCALE 4 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV	4
-----	---