








**TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
①		X.H.GU	G.F.YANG	07/07/20
②		X.H.GU	G.F.YANG	11/29/21
③				

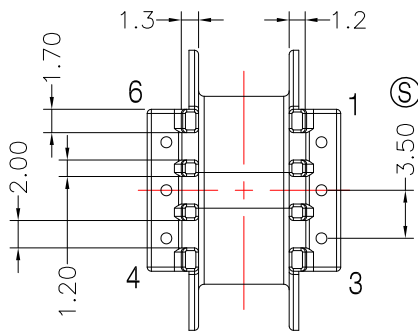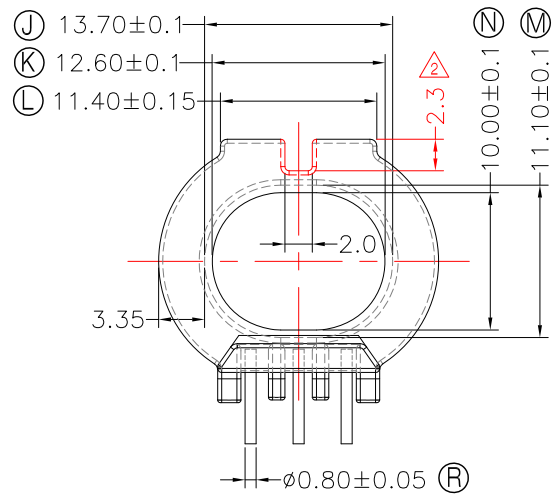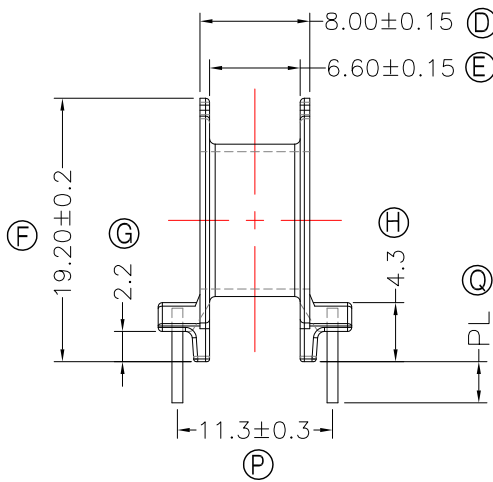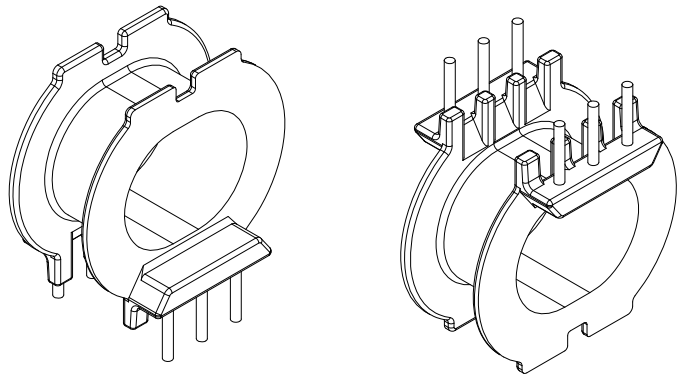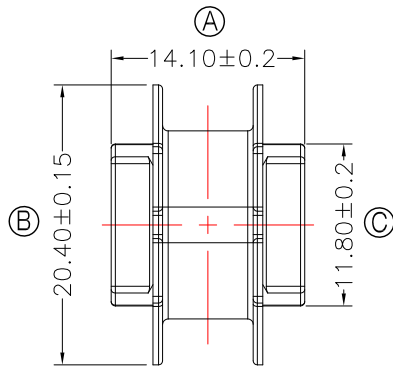

NOTE:

- 1.任一點的強度為1.5kgMIN.
- 2.耐壓4.0Kv /1.5mA 60S;
- 3.焊錫溫度:450°±10° 3SEC
- 4.PIN拉力須焊前1.0KgMIN焊后1.5KgMIN.
- 5.Winding Space=6.6\*3.35=22.11mm<sup>2</sup>

DWG NO. ATQ23.7-14.6-6P-TH-E9-17

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-10591.1706	PM-9823	CP WIRE	Sn	ALL PIN PL=3.0±0.2	H
TBI-238-10591.1716	PM-9823	CP WIRE	Sn	CUT PIN#6 PL=3.0±0.2	
TBI-238-10591.1726	PM-9823	CP WIRE	Sn	CUT PIN#5 PL=3.0±0.2	
TBI-238-10591.1736	PM-9823	CP WIRE	Sn	CUT PIN#4 PL=3.0±0.2	
TBI-238-10591.1746	PM-9823	CP WIRE	Sn	CUT PIN#1 PL=3.2±0.2	
TBI-238-10591.1756	PM-9823	CP WIRE	Sn	CUT PIN#3 PL=3.2±0.2	
TBI-238-10591.1766	PM-9823	CP WIRE	Sn	CUT PIN#1,5,6 PL=3.2±0.2	
TBI-238-10591.1776	PM-9823	CP WIRE	Sn	CUT PIN#4,5,6 PL=3.2±0.2	

TOLERANCE: 0<L<=4: ±0.1 4<L<=16: ±0.2 16<L<=63: ±0.3 UNIT : m / m SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.  
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min.  
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 2