









TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.


Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	07/09/13
2		X.H.GU	G.F.YANG	08/02/13
3				

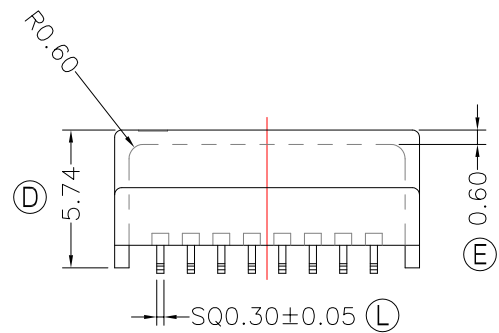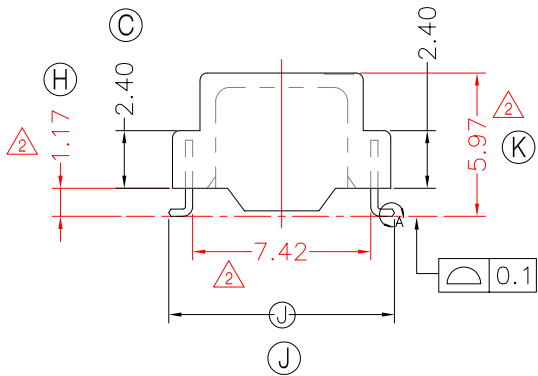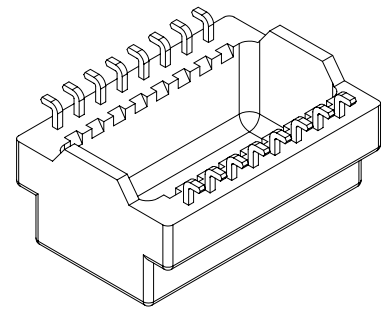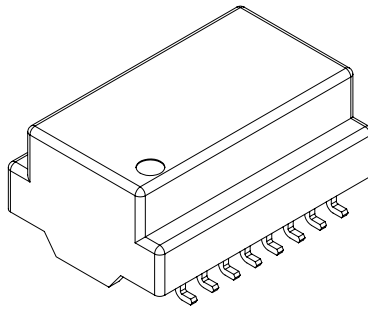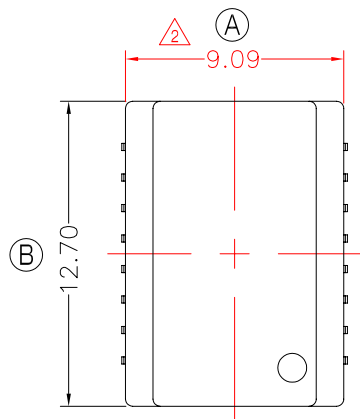

DETAIL:A
PATENTED

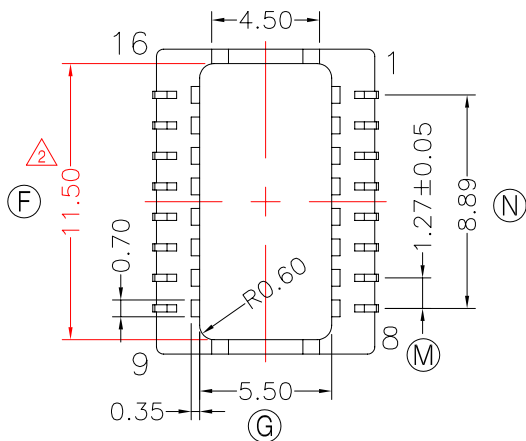


NOTE:

- *** PB wire Immersion Sn on terminal :
Thickness:Sn plating,100,7.5~12.5 μm(300~500 μ inches),
Base nickel 1.25~2.5 μm (50~100 μ inches).
- *** Pull strength of Pin : 1.0 Kg Min.

DWG NO. H2982-16P-L-1.27-B0-11

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-113-17201.1103	PM-9630	PB	Sn	ALL PIN (J) = 9.40±0.15	H.C
TBI-113-17201.1113	PM-9630	PB	Sn	ALL PIN (J) = 9.65±0.13	



TOLERANCE: ±0.13

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.

2. CP wire Immersion Sn on terminal : Thickness:Sn plating,Thickness:Sn plating,100,5~12.5 μm(200~500 μ inches),Base nickel 1.25~2.5 μm (50~100 μ inches),

3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 2