








TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.



Tel : 86-769-88789989 Fax : 86-769-88789999
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△6		T.S.LII	W.H.HSU	06/28/05
△7		T.S.LII	W.H.HSU	06/27/06
△8		T.S.LII	W.H.HSU	07/24/06

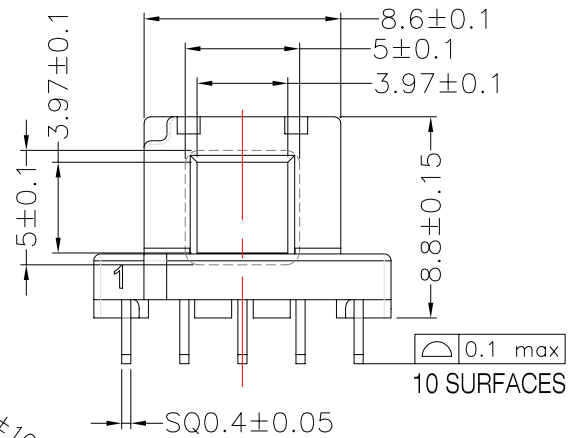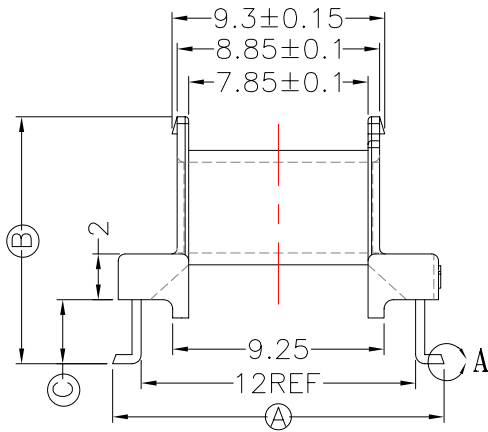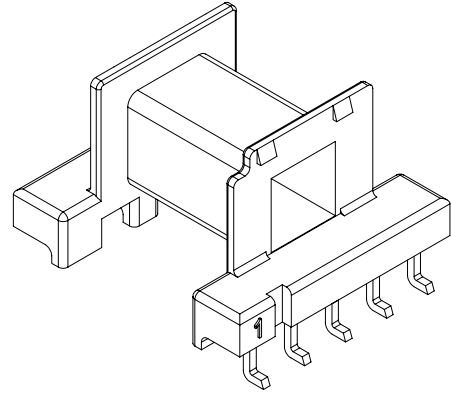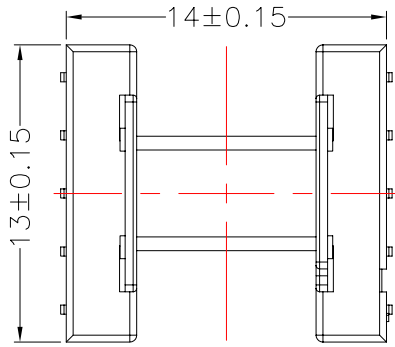

DETAIL : A
(PATENTED)

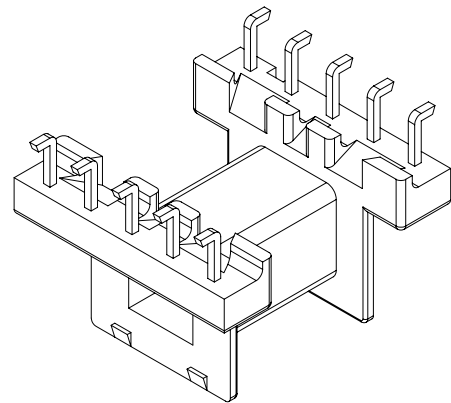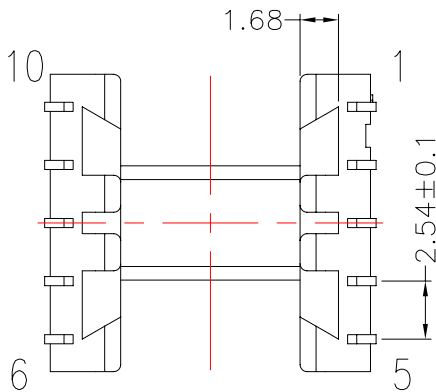

DWG NO. EF12.6-10P-L-2.54-D-1

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE.
△7 TBI-105-01041.103	PM-9630	PB	△7 Sn	ALL PIN (A)=14.5±0.15 (B)=9±0.15 (C)=1.0	
△6 TBI-105-01041.113	PM-9630	PB	△8 Sn	ALL PIN (A)=16.5±0.15 (B)=9±0.15 (C)=1.0	
△8 TBI-105-01041.123	PM-9630	PB	Sn	ALL PIN (A)=18.4±0.2 (B)=9±0.15 (C)=1.0	
△8 TBI-105-01041.133	PM-9630	PB	Sn	CUT PIN #2,4,7,9 (A)=14.5±0.15 (B)=10.8±0.15 (C)=2.8	
△8 TBI-105-01041.143	PM-9630	PB	Sn	CUT PIN #3,10 (A)=14.5±0.15 (B)=9±0.15 (C)=1.0	
F TBI-105-01041.153	PM-9630	PB	Sn	CUT PIN #3,8 (A)=14.5±0.15 (B)=9±0.15 (C)=1.0	042-2235.002

TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05 UNIT : m / m SCALE 3 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 8