




TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http://tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△1		X.X.YUAN	G.F.YANG	11/28/14
△2				
△3				

A
B
C
D
E
F

A
B
C
D
E
F

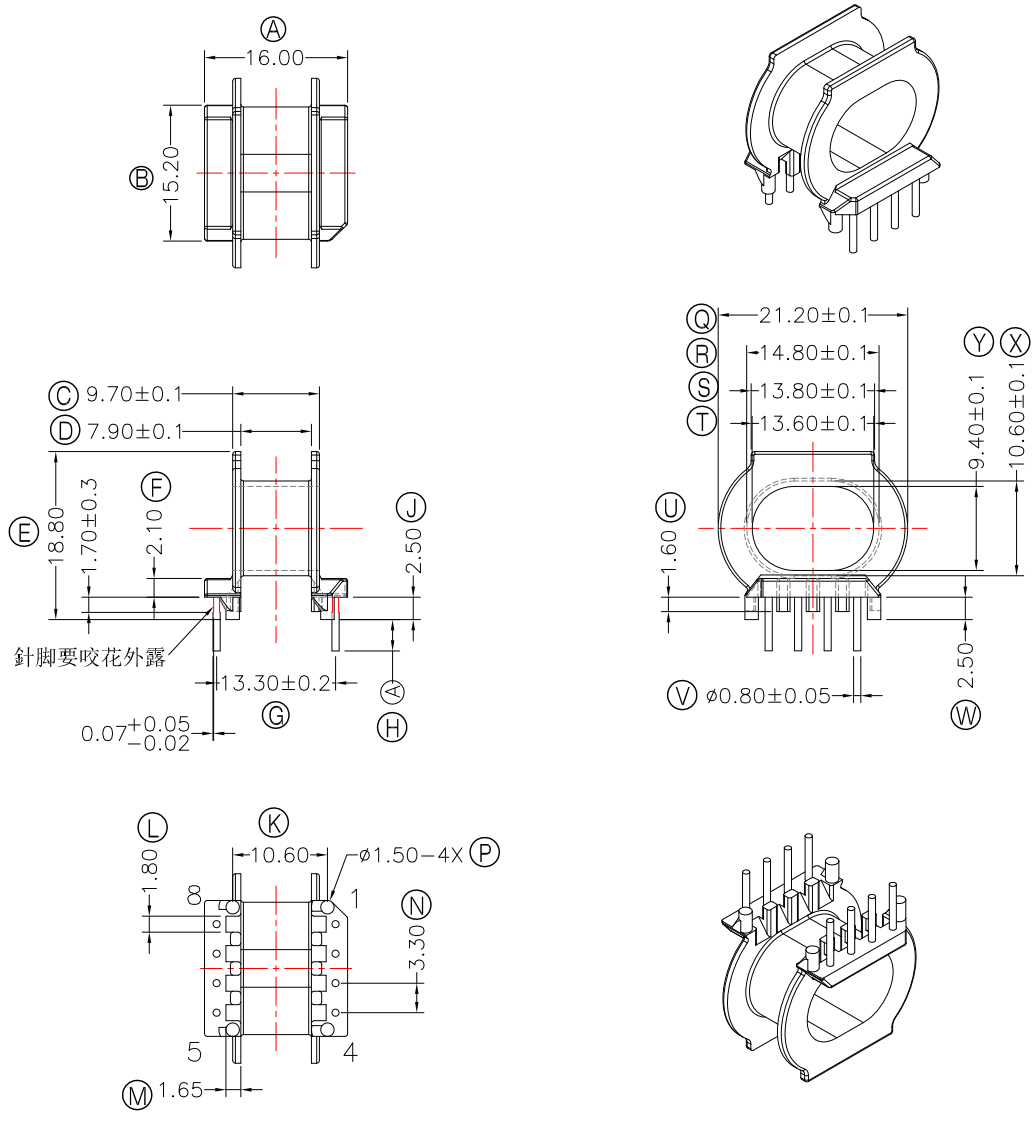

DWG NO.	ATQ25-16-8P-TH-3.3-A-11				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-09011.1106	PM-9630	CP WIRE	Sn	ALL PIN (A)=3.7±0.2	H
TBI-238-09011.1116	PM-9630	CP WIRE	Sn	CUT PIN#2,4,5,6,7(A)=3.7±0.2	
TBI-238-09011.1126	PM-9630	CP WIRE	Sn	CUT PIN#2,4,5,6,7(A)=3.7±0.2	
TBI-238-09011.1136	PM-9630	CP WIRE	Sn	CUT PIN#2,3,5,6,7(A)=3.2±0.2	
TBI-238-09011.1146	PM-9630	CP WIRE	Sn	CUT PIN#2,4,5,6,7(A)=5.0±0.5	
TBI-238-09011.1156	PM-9630	CP WIRE	Sn	CUT PIN#1,2,3,6,7(A)=3.7±0.2	
TBI-238-09011.1166	PM-9630	CP WIRE	Sn	CUT PIN#5,7,8 (A)=3.7±0.2	
TBI-238-09011.1176	PM-9630	CP WIRE	Sn	CUT PIN#1,4,7,8 (A)=3.7±0.2	
TBI-238-09011.1186	PM-9630	CP WIRE	Sn	CUT PIN#1,4,7,8 (A)=2.2±0.2	
TBI-238-09011.1196	PM-9630	CP WIRE	Sn	CUT PIN#1,2,6,7 (A)=3.7±0.2	
TBI-238-09011.11A6	PM-9630	CP WIRE	Sn	CUT PIN#1,5,6 (A)=3.7±0.2	
TBI-238-09011.11B6	PM-9630	CP WIRE	Sn	ALL PIN (A)=3.0±0.2	
TBI-238-09011.11C6	PM-9630	CP WIRE	Sn	CUT PIN#1,4,7,8 (A)=4.0±0.2	
TBI-238-09011.11D6	PM-9630	CP WIRE	Sn	CUT PIN#1,5,6 (A)=3.0±0.2	
TBI-238-09011.11E6	PM-9630	CP WIRE	Sn	CUT PIN#3,4,5,6 (A)=4.0±0.2	
TBI-238-09011.11F6	PM-9630	CP WIRE	Sn	CUT PIN#2,3,5,6,8 (A)=3.2±0.2	
TBI-238-09011.11G6	PM-9630	CP WIRE	Sn	CUT PIN#1,3,5,6,8 (A)=3.0±0.2	
TBI-238-09011.11H6	PM-9630	CP WIRE	Sn	CUT PIN#1,3,4,6,7 (A)=3.0±0.2	

TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3 UNIT : m/m SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100.5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100.5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches)max.

REV	1
-----	---