








TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.



Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
①		T.S.LII	W.H.HSU	03/23/04
②		T.S.LII	W.H.HSU	07/24/06
③		X.H.GU	G.F.YANG	01/04/19

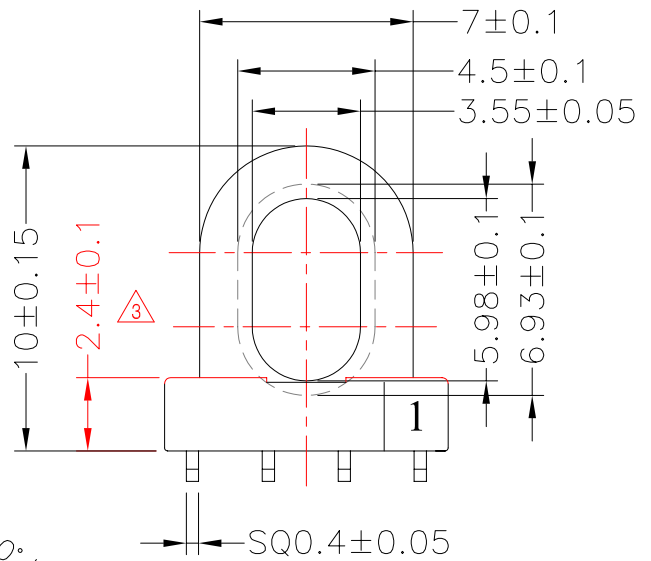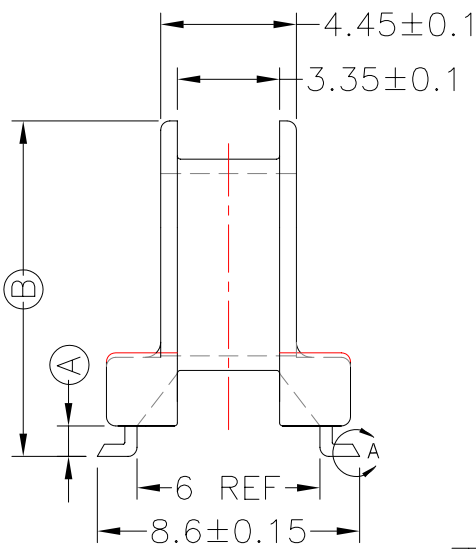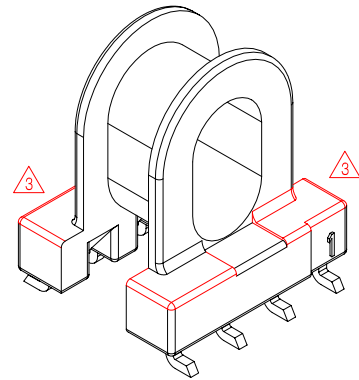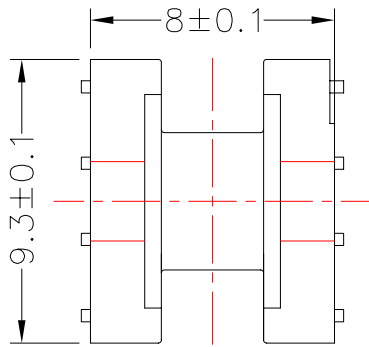

DETAIL : A
(PATENTED)

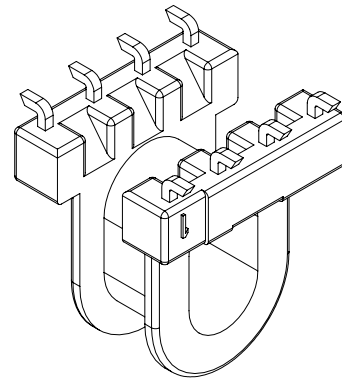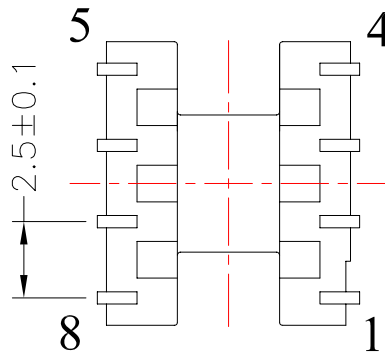

DWG NO.	EPX7-8P-L-2.5-B1-1				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-103-08211.103	PM-9630	PB	Sn	ALL PIN(A)=1.0±0.15(B)=11.0±0.15	S
TBI-103-08211.113	PM-9630	PB	Sn	ALL PIN(A)=1.15±0.15(B)=11.15±0.15	H
TBI-103-08211.123	PM-9630	PB	Sn	ALL PIN(A)=2.0±0.15(B)=12.0±0.15	
	TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05			UNIT : m / m	SCALE 4 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV	3
-----	---