









TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△5		T.S.LII	W.H.HSU	04/02/07
△6		S.Y.TANG	G.F.YANG	02/03/09
△7		H.X.DUAN	G.F.YANG	09/07/11

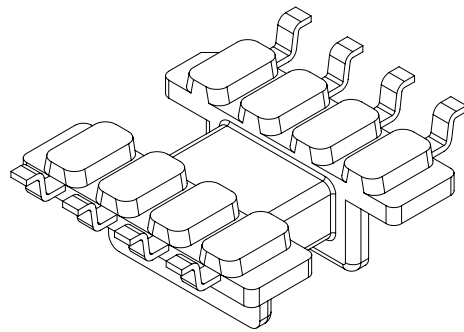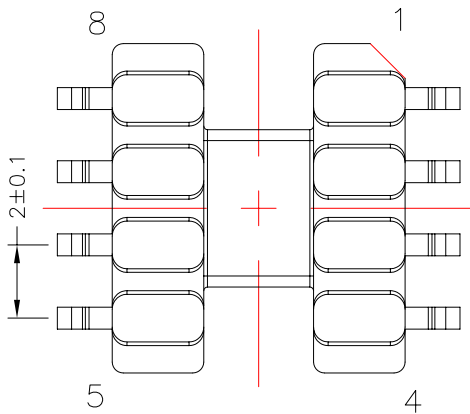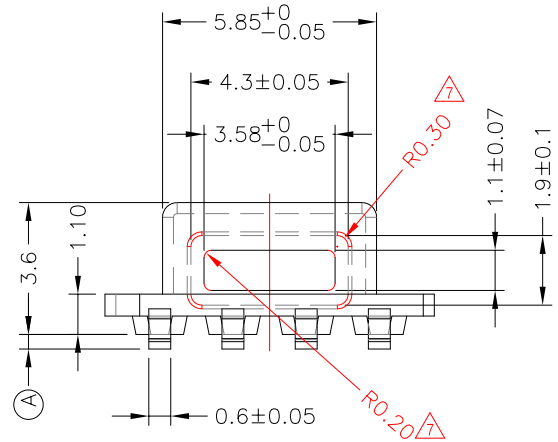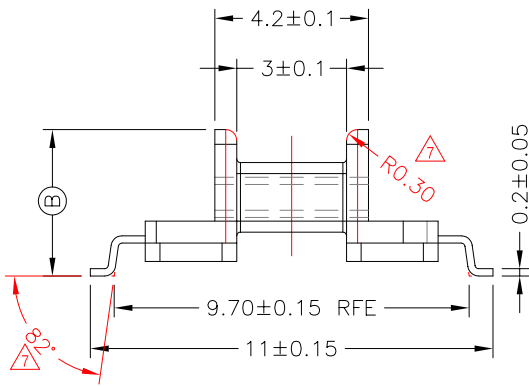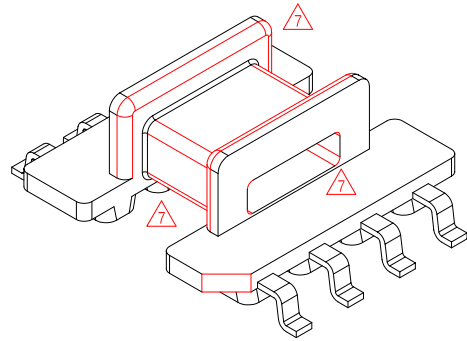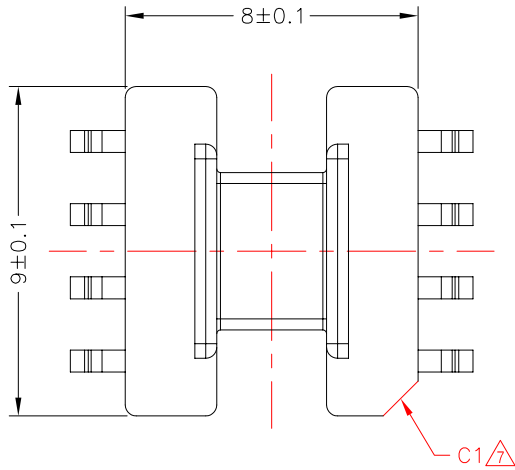

NOTE:

繞線管及葉片內側不容許有毛邊和斷差.

DWG NO.	BEM8-8P-GW-2.0-B-1					
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE	
TBI-101-03021.103	PM-9630	PB	Sn	ALL PIN (A)=0.4 (B)=4.0±0.15		
TBI-101-03021.113	PM-9630	PB	Sn	CUT PIN #8 (A)=0.3 (B)=3.9±0.1		H.C
TBI-101-03021.123	PM-9630	PB	Sn	CUT PIN #6,8 (A)=0.3 (B)=3.9±0.1		
△5 TBI-101-03021.133	PM-9630	PB	Sn	CUT PIN #8 (A)=0.4 (B)=4.0±0.1		
△6 TBI-101-03021.143	PM-9630	PB	Sn	CUT PIN #6,8 (A)=0.4 (B)=4.0±0.1		
△7 TBI-101-03021.153	PM-9630	PB	Sn	CUT PIN #5 (A)=0.4 (B)=4.0±0.15		F
△7 TBI-101-03021.163	PM-9630	PB	Sn	CUT PIN #7,8 (A)=0.4 (B)=4.0±0.15		
TBI-101-03021.173	PM-9630	PB	Sn	CUT PIN #2,3,6,7 (A)=0.4 (B)=4.0±0.15	071-BEM8-09	
	TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05			UNIT : m / m	SCALE 1 : 1	

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 7