




TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.









Tel : 86-769-88789999 Fax : 86-769-88789999
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	02/25/14
2		X.H.GU	G.F.YANG	03/13/17
3		X.H.GU	G.F.YANG	10/31/17

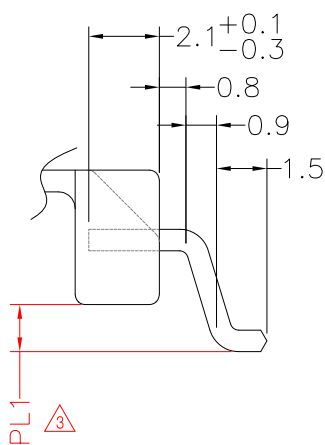

Scale 3: 1

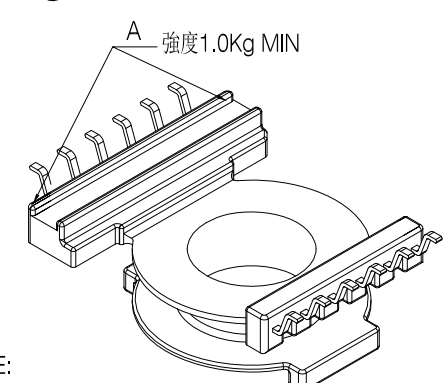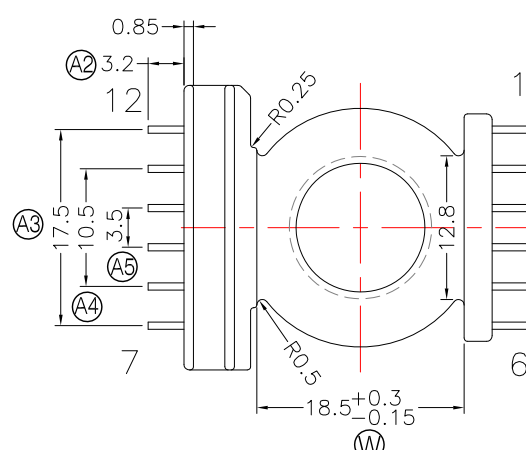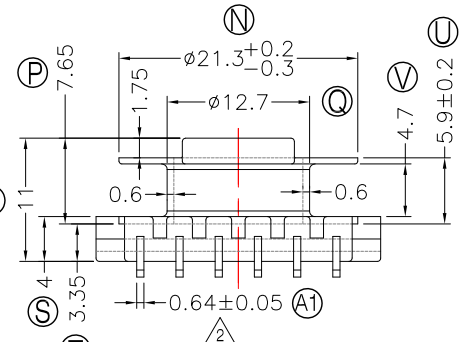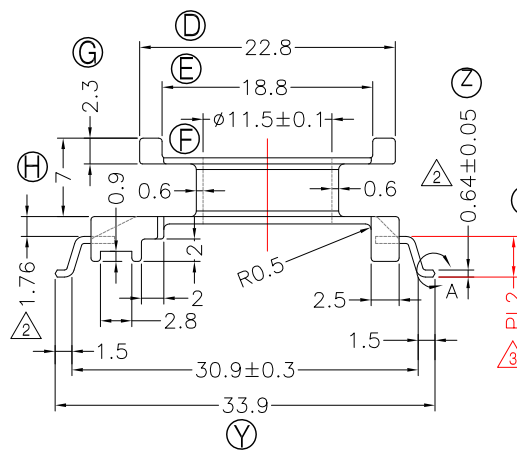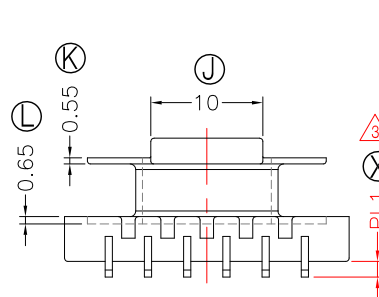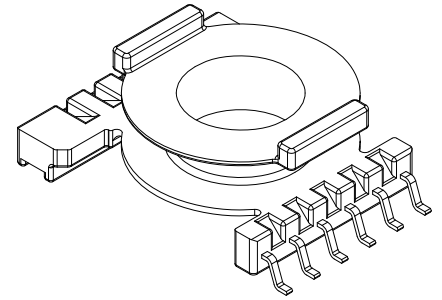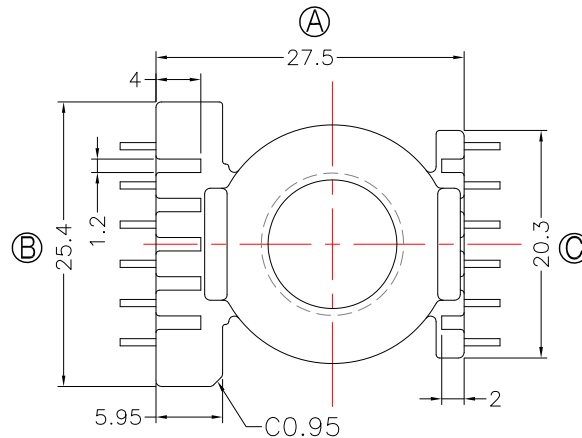

- NOTE:
- 1.耐壓4.0Kv /1.5mA 60S;
 - 2.焊錫溫度:450°±10° 3SEC
 - 3.切斷面不能露銅
 - 4.焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
 - 5.任意一點強度須1.5KgMIN;(除以下測試點.A.處為1.0KgMIN).

DWG NO.	EQ25-12P-GW-0H-11			PIN ALLOCATION			
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)				
TBI-131-01081.1106	PM-9630(BK)	CP WIRE	Sn	ALL PIN	PL1=1.4±0.2	PL2=3.64±0.2	H.C
TBI-131-01081.1116	PM-9630(BK)	CP WIRE	Sn	NO PIN#12	PL1=1.4±0.2	PL2=3.64±0.2	
TBI-131-01081.1126	PM-9630(BK)	CP WIRE	Sn	NO PIN#12	PL1=0.9±0.2	PL2=3.14±0.2	
TBI-131-01081.1136	PM-9630(BK)	CP WIRE	Sn	NO PIN#12	PL1=0.7±0.2	PL2=2.94±0.2	

	TOLERANCE: 0<L<=4: ±0.1 4<L<=16: ±0.2 16<L<=63: ±0.3	UNIT : m / m	SCALE 1 : 1
--	--	--------------	-------------

Finish:	1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5-10 μ m (200-400 μ inches) min,Base nickel 1.27-2.0 μ m (50.8-80 μ inches) min. 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μ m (200 μ inches) min. 3. Coplanarity deviation: 0.10 mm (0.004 inches)max.	REV	3
---------	--	-----	---