









TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
③		S.Y.TANG	S.M.SHIH	10/13/06
④		S.Y.TANG	S.M.SHIH	04/02/07
⑤		X.X.YUAN	G.F.YUAN	09/19/14

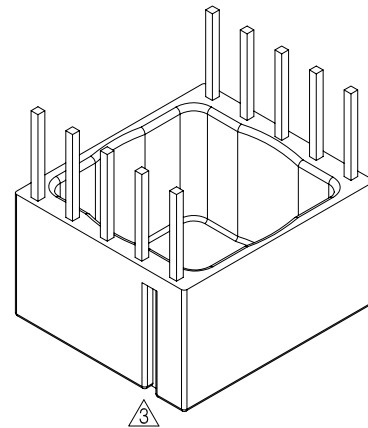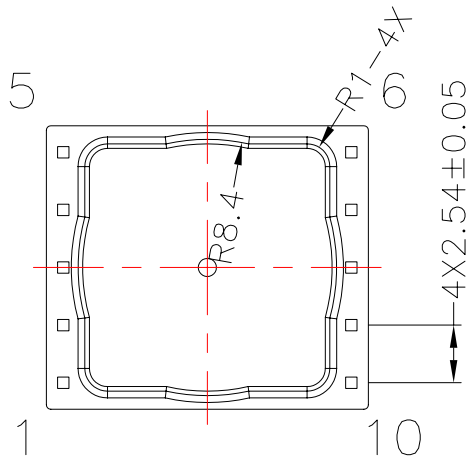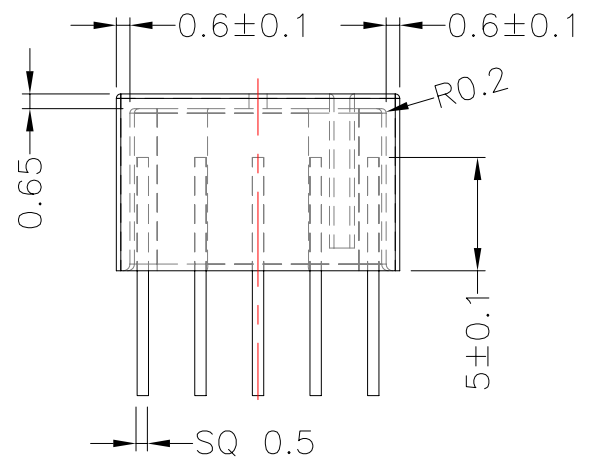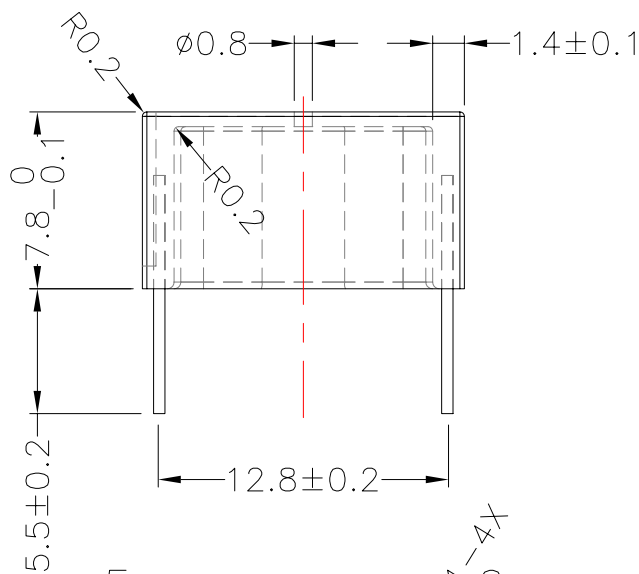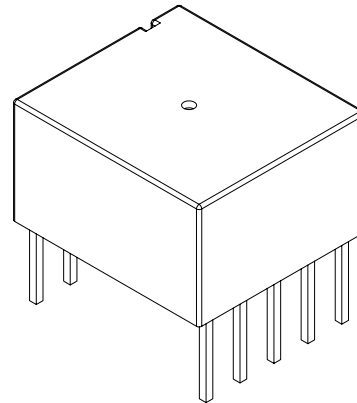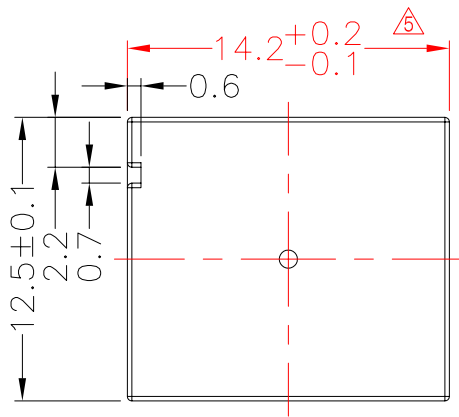

NOTE:CASE 頂部共面度為0.10 MAX.

DWG NO.	54-TR20-10P-TH-2.54-B-1				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-218-11011.103	PM-9630	PB	Sn	插1,5,6,10	54-TR20SAA01
TBI-218-11011.113	PM-9630	PB	Sn	插1,3,5,6,8,10	54-TR20SBA01
TBI-218-11011.123	PM-9630	PB	Sn	插1,2,4,5,6,7,10	54-TR20SCA01
TBI-218-11011.133	PM-9630	PB	Sn	插1,3,4,5,6,8,10	54-TR20SDA01
TBI-218-11011.143	PM-9630	PB	Sn	插1,2,4,5,6,7,9,10	54-TR20SEA01
	TOLERANCE : .X ±0.15 .XX ±0.10 .XXX ±0.05			UNIT : m / m	SCALE 3 : 1
Finish:	1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min. 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min. 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.				REV 5