

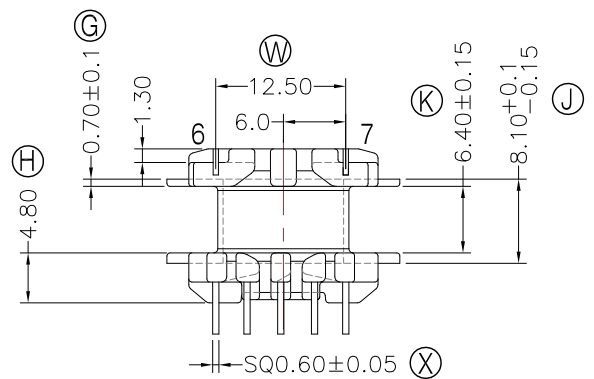
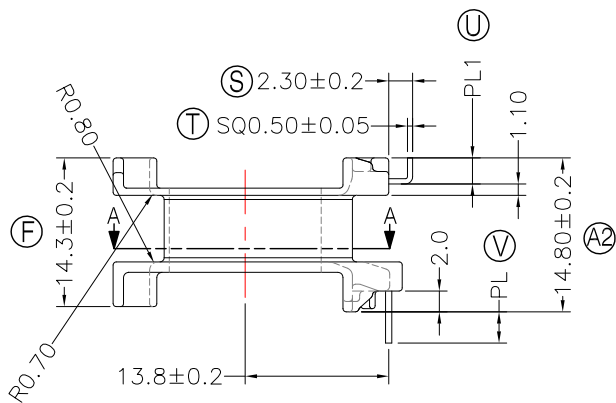


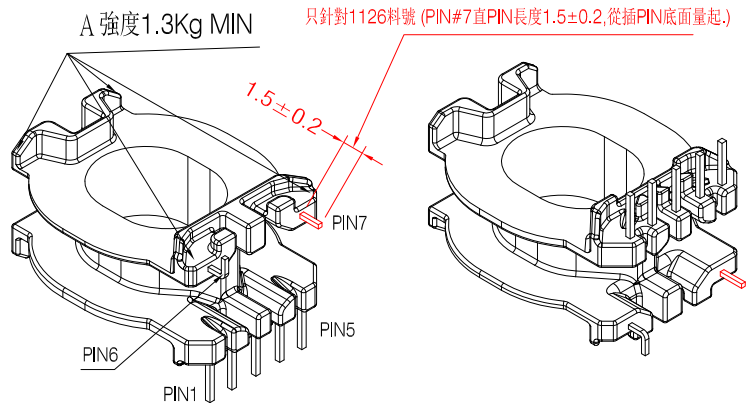



TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	03/03/22
2				
3				

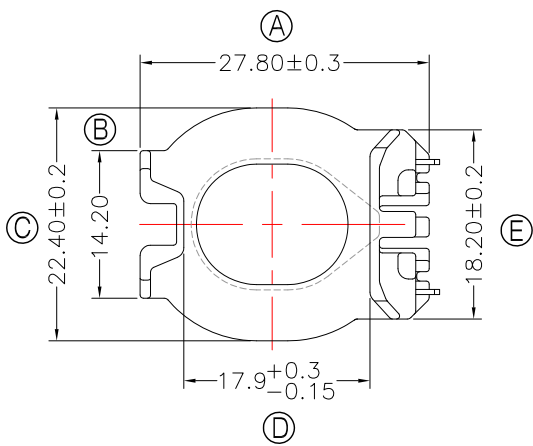

正式模

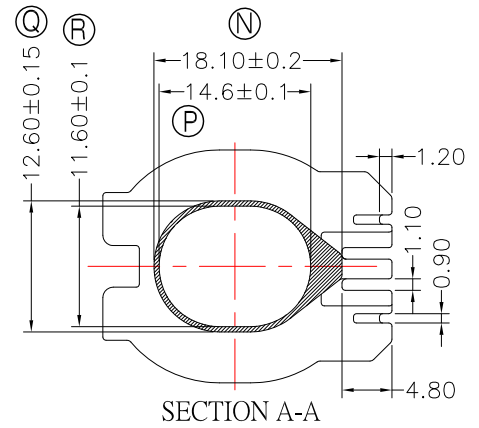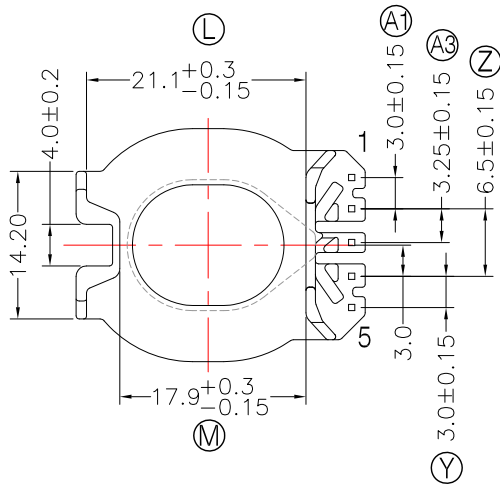

NOTE:

- 1.耐壓4.0Kv /1.5mA 60S;
- 2.焊錫溫度:450°±10° 3SEC
- 3.Winding Space=6.4\*4.9=31.36mm<sup>2</sup>
- 4.焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
- 5.任一點的強度為1.8kg MIN;其中頂部A處為1.3kg MIN;

DWG NO.	ATQ27-14.4-7P-TH-C0-11			
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION
TBI-238-48301.1106	PM-9630	CP WIRE	Sn	ALL PIN PL=4.5±0.2 PL1=2.5±0.2 S
TBI-238-48301.1116	PM-9630	CP WIRE	Sn	ALL PIN PL=5.0±0.2 PL1=2.5±0.2 H
TBI-238-48301.1126	PM-9630	CP WIRE	Sn	ALL PIN PL=5.0±0.2 PL1=1.5±0.2 (PIN#7直PIN長度1.5±0.2,從插PIN底面量起)
TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3				
UNIT : m / m			SCALE 1 : 1	
Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min. 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min. 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.				REV 1