










**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

| REV | SYM | DRAFTER | CHECKER | DATE |
|-----|-----|----------|---------|----------|
| ① | | S.Y.TANG | W.H.HSU | 07/18/07 |
| ② | | S.Y.TANG | W.H.HSU | 09/18/07 |
| ③ | | | | |

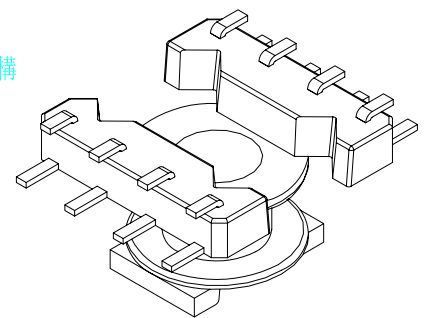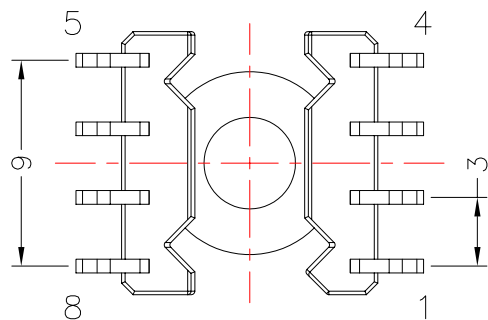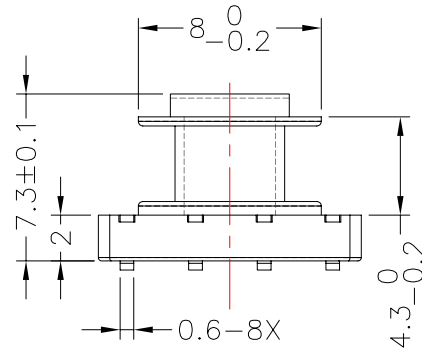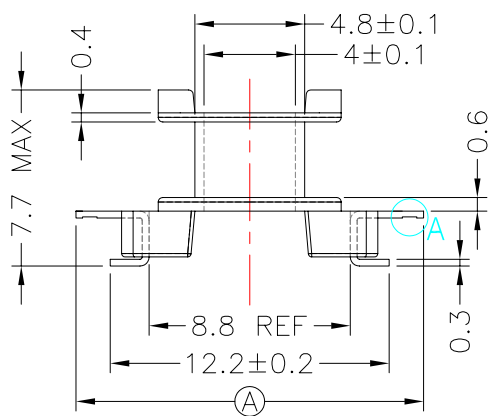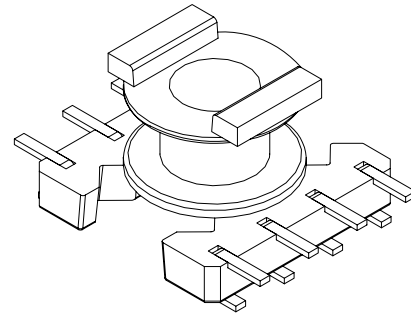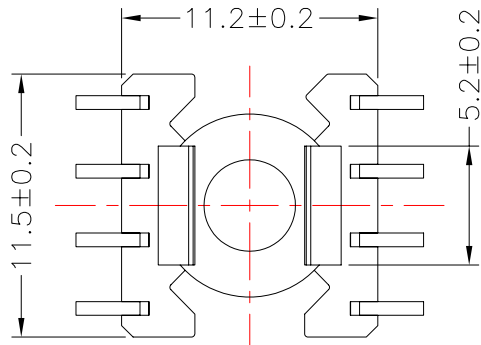

DWG NO. RM4-8P-J-3.0-C-1

| PART NO. | MATERIAL (BOBBIN) | MATERIAL (TERMINAL) | TERMINAL (PLATING) | PIN ALLOCATION | NOTE |
|----------|-------------------|---------------------|--------------------|----------------|------|
|----------|-------------------|---------------------|--------------------|----------------|------|

| | | | | | |
|---------------------|---------|-----|----|----------------------------|--|
| TBI-108-01031.103 | PM-9630 | P.B | Sn | ALL PIN (A) = 15.2±0.2 | |
| ② TBI-108-01031.113 | PM-9630 | P.B | Sn | ALL PIN (A) = 19.0±0.2 | |
| TBI-108-01031.123 | PM-9630 | P.B | Sn | CUT PIN #2,7(A) = 15.2±0.4 | |

TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05

UNIT : m / m

SCALE 3: 1

Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 2