

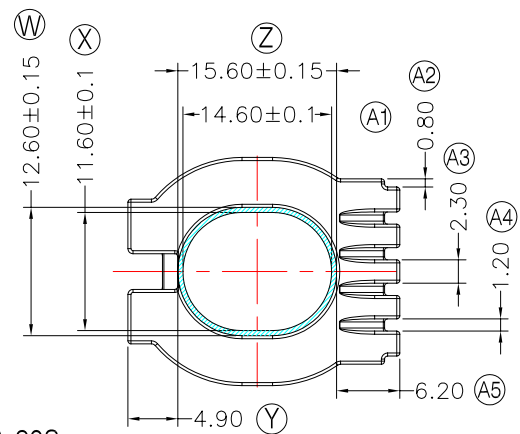
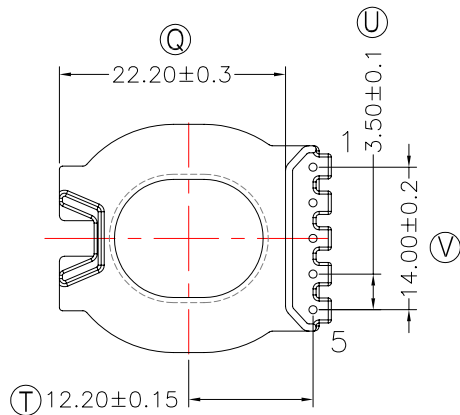
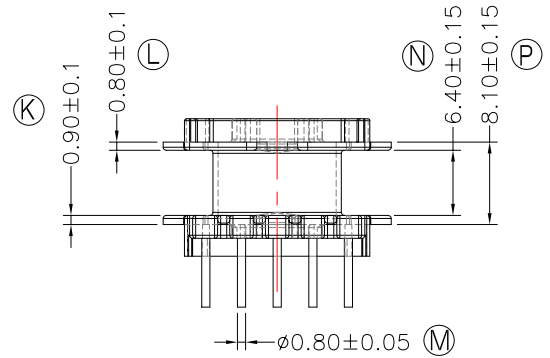


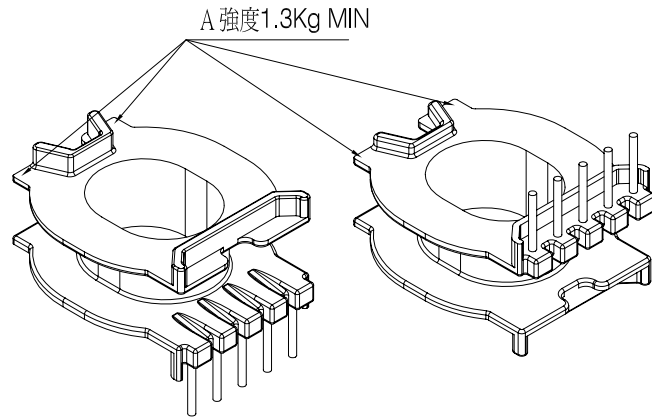

TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△1		M.WANG	G.F.YANG	09/02/16
△2				
△3				

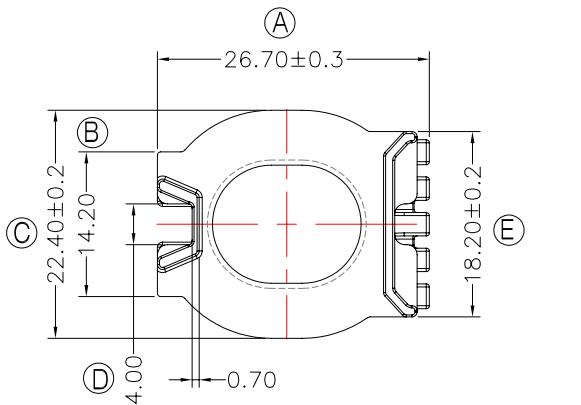

SECTION A-A

NOTE:

- 1.耐壓4.0Kv /1.5mA 60S;
- 2.焊錫溫度:450°±10° 3SEC
- 3.焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
- 4.任一點的強度為1.8kg MIN;其中頂部A處為1.3kg MIN;
- 5.Winding Space=6.4\*4.9=31.36mm<sup>2</sup>

DWG NO.	ATQ27-14.4-5P-TH-E5-17				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-03551.1706	PM-9823	CP WIRE	Sn	ALL PIN P/L=5.0±0.2	S
TBI-238-03551.1716	PM-9823	CP WIRE	Sn	NO PIN#4 P/L=5.0±0.2	H
TBI-238-03551.1726	PM-9823	CP WIRE	Sn	NO PIN#2 P/L=5.0±0.2	
TBI-238-03551.1736	PM-9823	CP WIRE	Sn	NO PIN#2 P/L=3.5±0.2	
TBI-238-03551.1746	PM-9823	CP WIRE	Sn	ALL PIN P/L=3.0±0.2	
TBI-238-03551.1756	PM-9823	CP WIRE	Sn	ALL PIN P/L=3.2±0.2	
TBI-238-03551.1766	PM-9823	CP WIRE	Sn	ALL PIN P/L=3.5±0.2	
TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3				UNIT : m/m	SCALE 1:1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μinches) min,Base nickel 0.625 μm (25 μ inches) min.  
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μinches) min.  
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1